



MPT Self-Priming, Solids-Handling Pump



Solids-Handling Impeller


Two-vane, semi-open, solids-handling impeller is fully balanced and able to pass solids up to 75 mm (3 in). Back pump-out vanes reduce axial loads for increased seal and bearing life.

Optimum Pump Efficiency

External impeller adjustment via four bushings allows clearances to be accurately reset, thereby restoring optimum performance.

Ease of Maintenance

- Back pull-out design includes a replaceable seal housing, which facilitates maintenance without disturbing the piping.
- Quick-disconnect cover plate fitted with a pressure relief valve exposes reversible wear plate and permits removal of blockages.

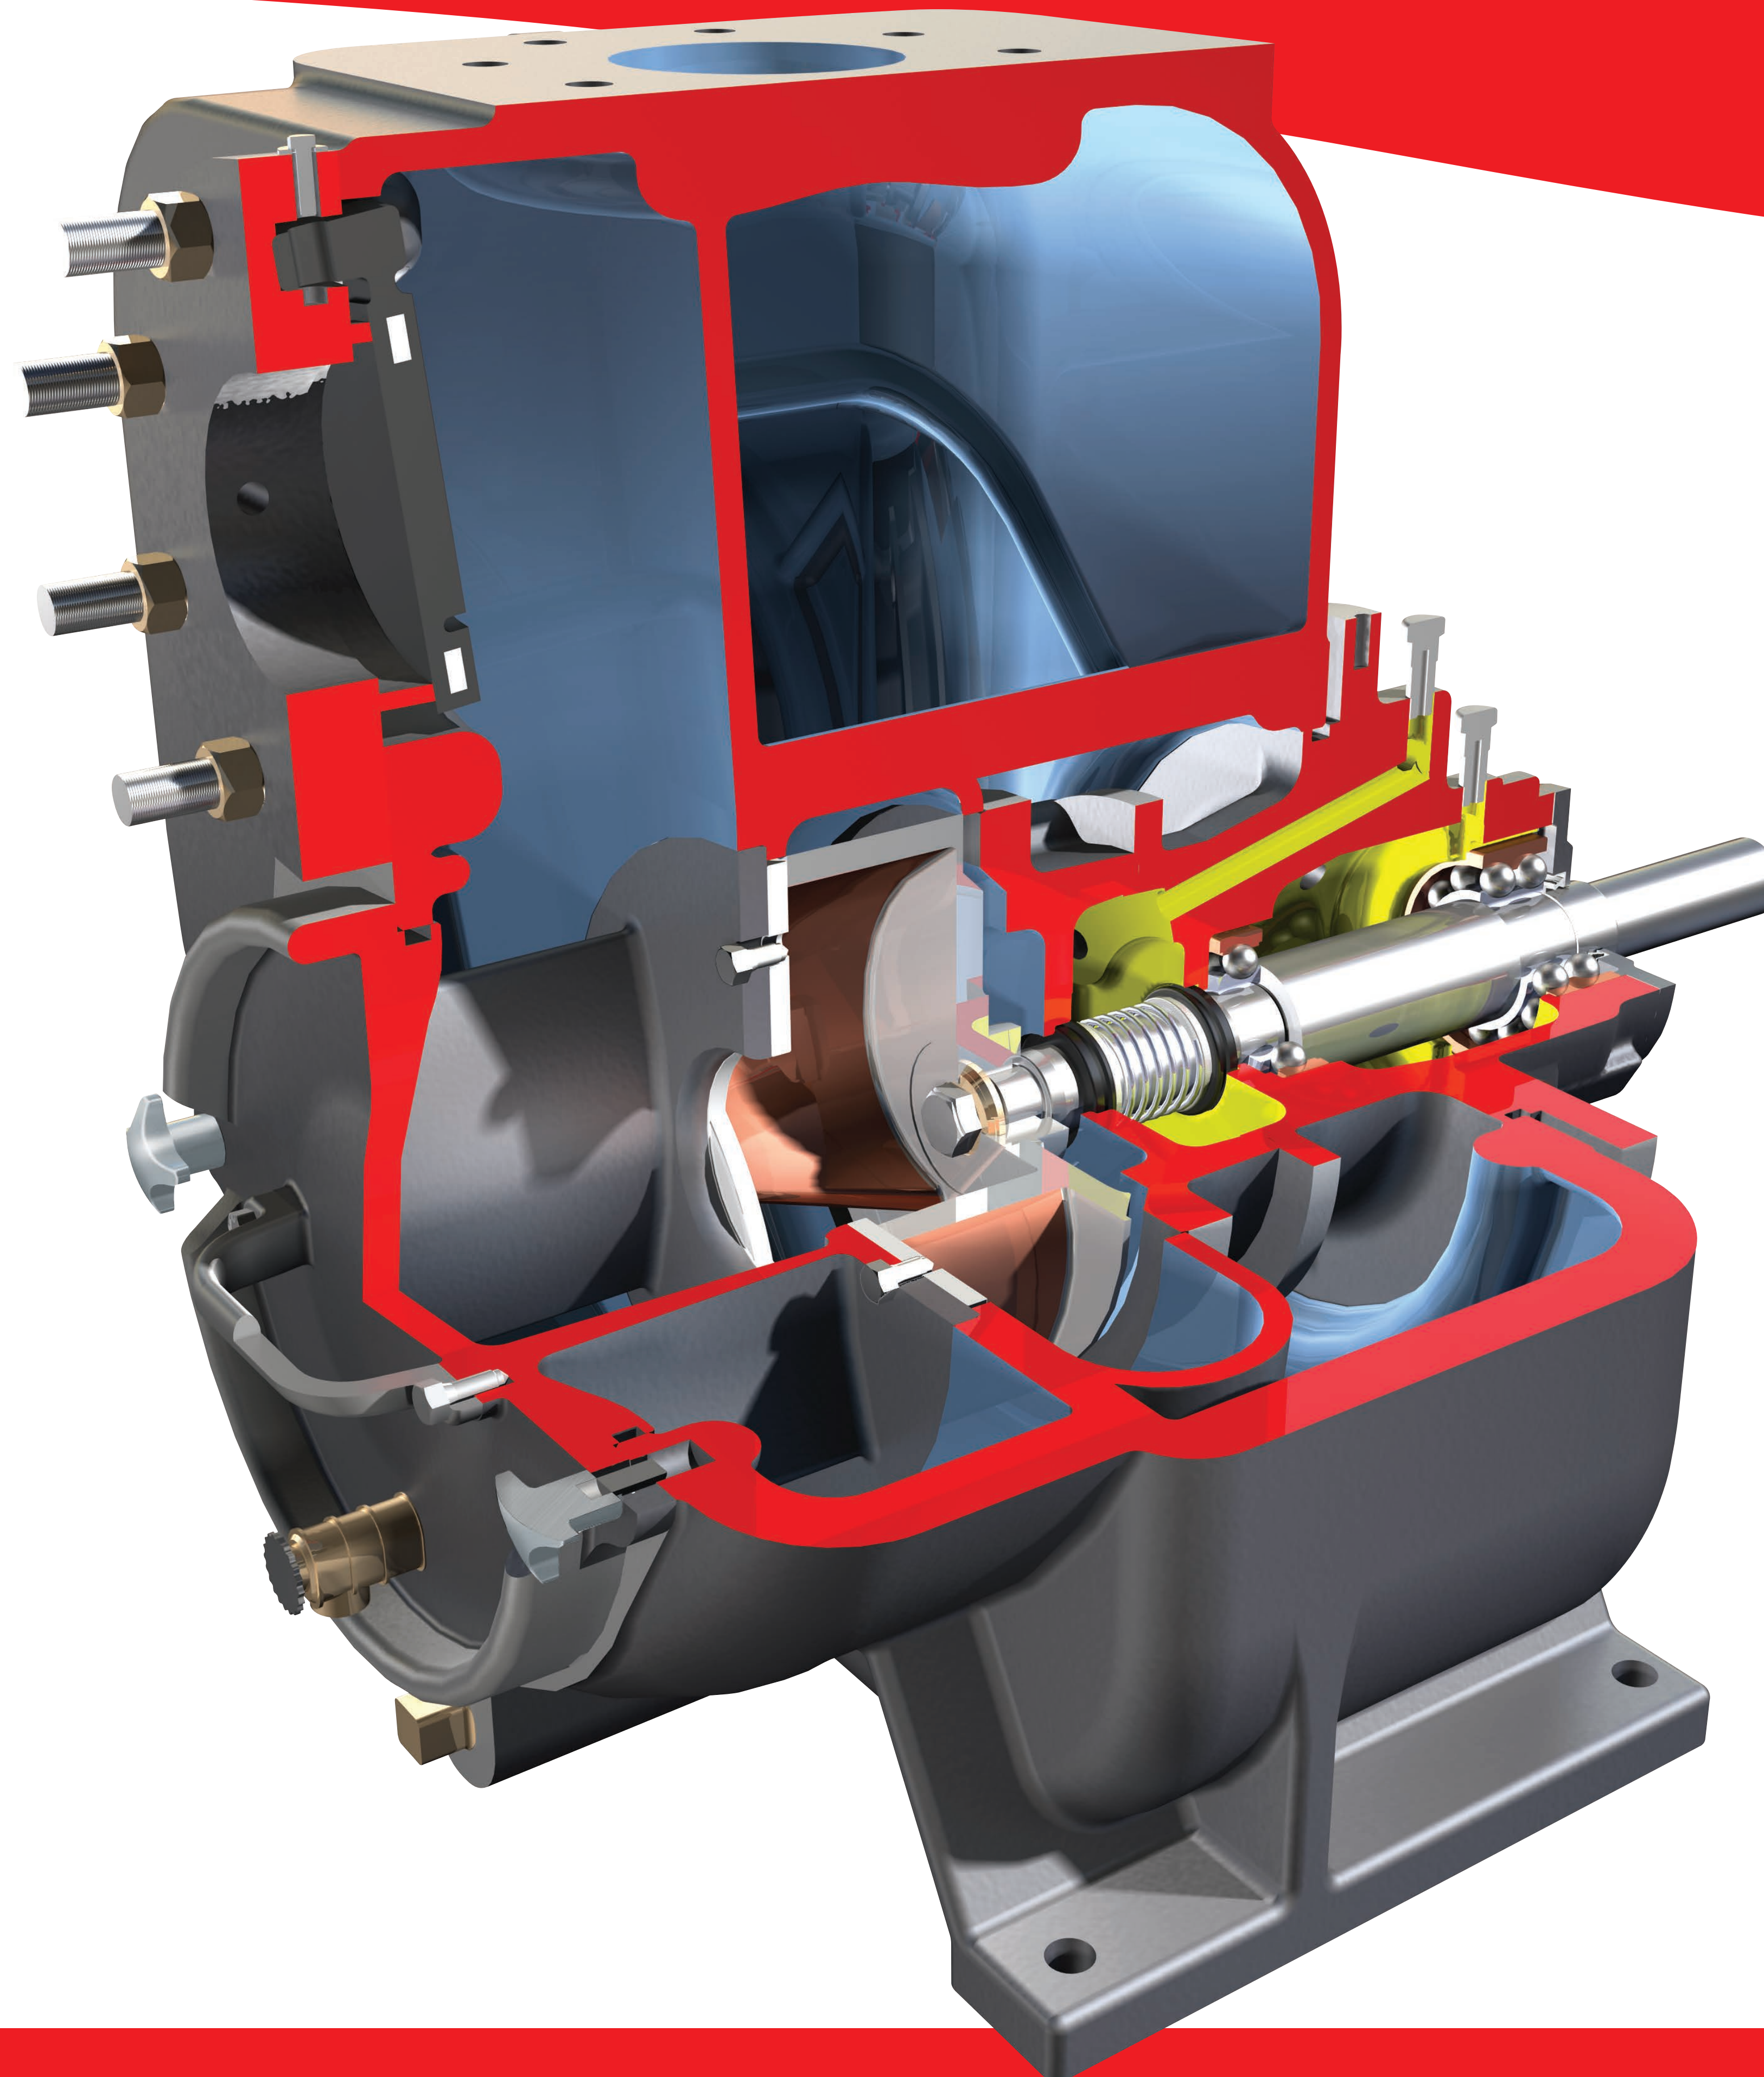

Robust Shaft Sealing Technology


Abrasion-resistant, double-mechanical seal with silicon carbide faces prevents liquid and grit from entering the seal chamber. Oil lubrication standard.

Rugged Bearings

Bearings are oil-lubricated, heavy-duty single row deep groove and angular contact double row type for radial and thrust loads, respectively. The housing is equipped with lip seal, eyebolt, oil breather cap and sight glasses.

Additional Features

- Extra large diameter, 431 SS shaft
- Solid one-piece flap valve
- Optional CD4MCuN impeller, seal plate and wear plate
- Five sizes: 2 in through 8 in discharge
- Flows to 550 m³/h (2400 gpm)
- Heads to 45 m (150 ft)

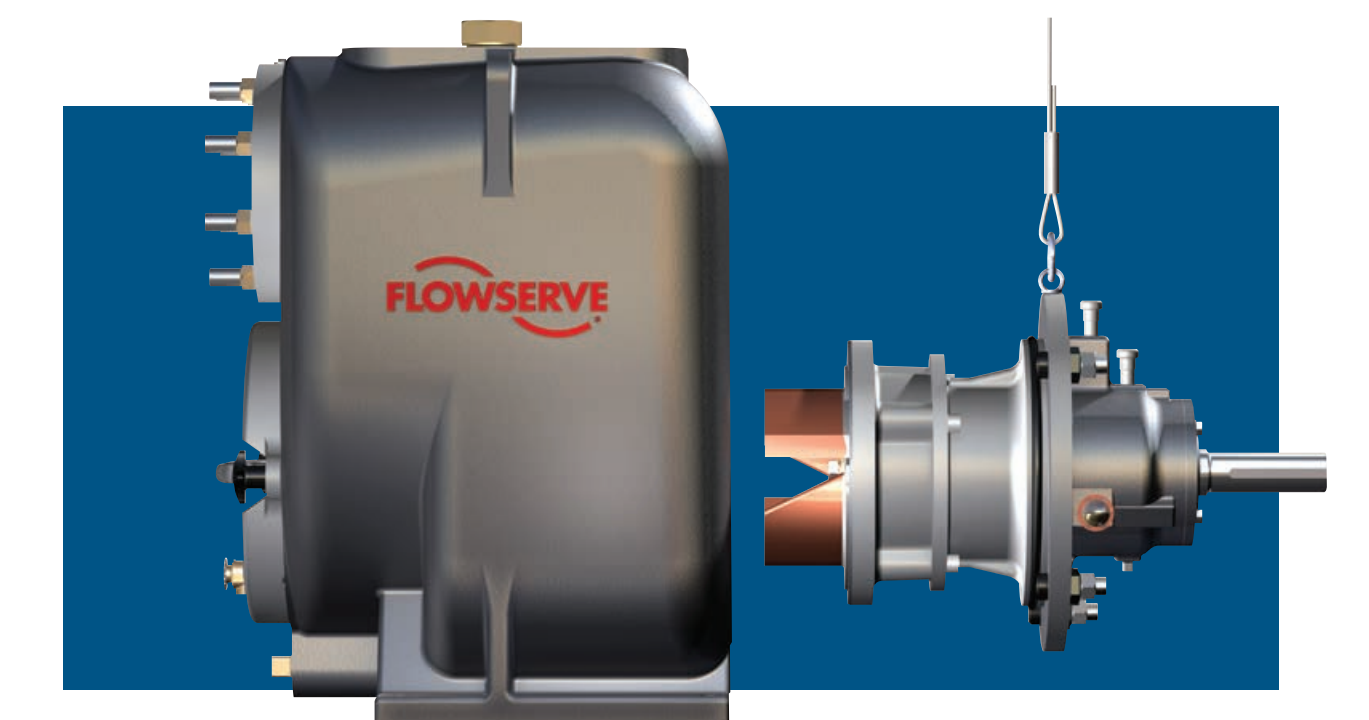

USA and Canada
Flowserve Corporation
5215 North O'Connor Blvd.
Suite 2300
Irving, Texas 75039-5421 USA
Telephone: +1 937 890 5639

Europe, Middle East, Africa
Flowserve Corporation
Parallelweg 13
4878 AH Etten-Leur
The Netherlands
Telephone: +31 76 502 8100

Latin America
Flowserve Corporation
Martín Rodríguez 4460
B1644GN-Victoria-San Fernando
Buenos Aires, Argentina
Telephone: +54 11 4006 8700
Telefax: +54 11 4714 1610

Asia Pacific
Flowserve Pte. Ltd.
10 Tuas Loop
Singapore 637345
Telephone: +65 6771 0600
Telefax: +65 6862 2329

FPD-1247c (E) July 2014. © 2014 Flowserve Corporation