## Industry standard Cable Plug, Form B




- Also available with LED indicator
- Protection class IP 65
- Contact form 11 mm

Plug for the connection of electrical components Industry standard, Form B.

Technical data		
Body material	Polyamide	
Contact material	Brass, electro-silver-plated	
Max. continuous temperature	194°F (+90°C)	
Cable diameter	4.5 - 7 mm	
Cable outlet	Straight	
Functional display	LED, color red	
Nominal voltage	0 to 250 V	
Contact resistance	5 mΩ	
Electrical connection	Terminal screws max. 0.75 mm <sup>2</sup>	
Protection class	IP 65	
Insulation group	3	
Number of terminals	2 pins + protective earth	



## **Dimensions [mm]**

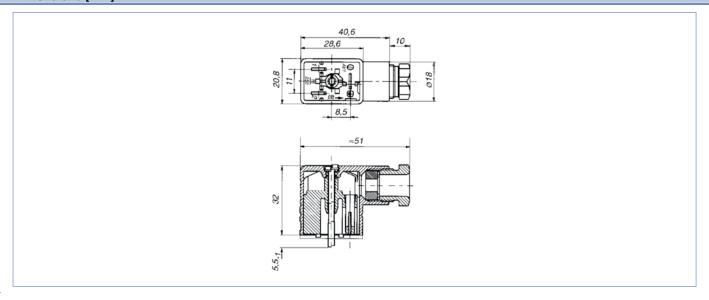

Ordering chart The delivery of a cable plug includes the flat seal and fixing screw.			
Voltage	Current rating	Item no. without cable	
Without circuitry			
0 to 250 V/AC/DC	max. 6 A	423 845	
With LED			
24 V/AC/DC	max. 6 A	423 849	
With LED and rectifier			
24 V/DC	max. 1.5 A	423 851	

