FLOWSERVE

BulkTite™
dimensional information sheet

depth

maximum protrusion from housing face
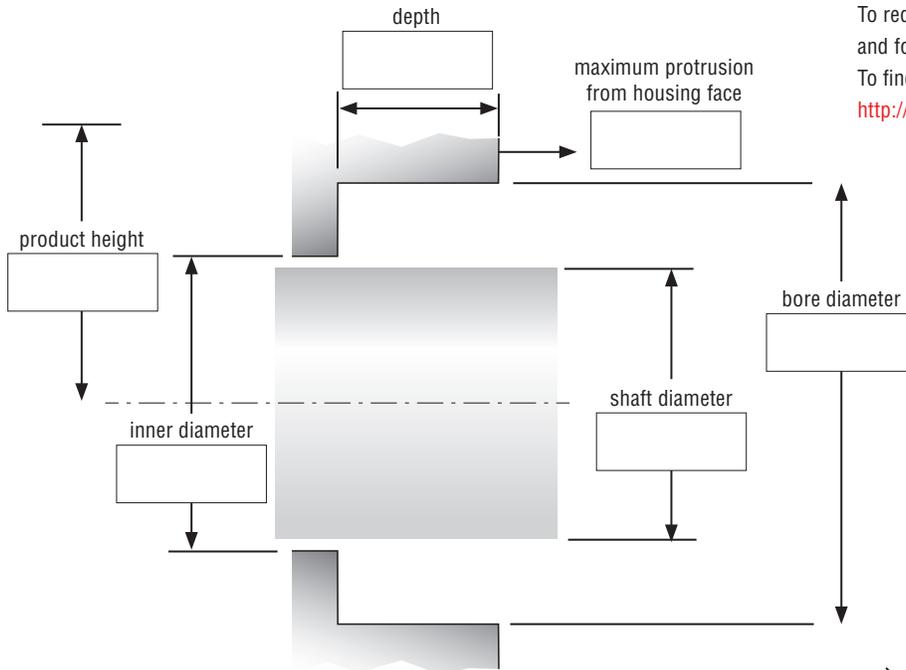
To request a quote, fill out the information below and forward it to your local Flowserve representative. To find your local representative go to http://www.flowserve.com/fls/Secondary/Sales-Locator

product height

bore diameter

inner diameter

shaft diameter

Equipment vented to atmosphere: ☐ yes ☐ no

Gas allowed into product: ☐ air ☐ nitrogen ☐ none

Equipment: ☐ screw conveyor ☐ rotary valve

☐ mixer ☐ other _____

Current seal type: ☐ lip ☐ packing ☐ other _____

Shaft position: ☐ horizontal ☐ vertical up ☐ vertical down

Product to be sealed (size, hardness, sharpness, density): _____

_____

4 bolt mount

DBC

chord length

flange OD
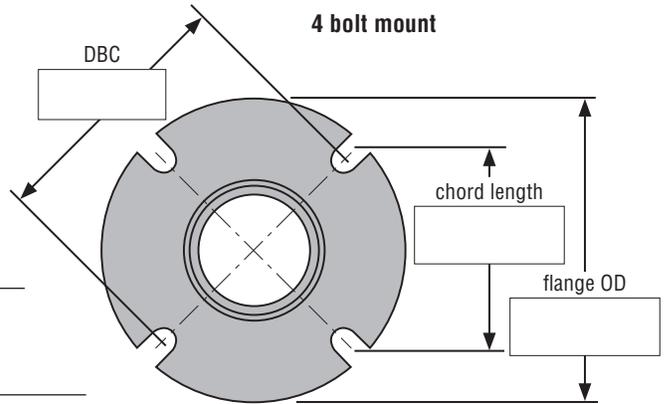
Temperature: _____ ☐ ˚C ☐ ˚F   **Speed:** _____ rpm

Misalignment: radial runout _____ axial runout _____

shaft perpendicularity _____

Stud size: _____ **O-ring preference:** ☐ Viton ☐ other _____

Additional information: _____

_____

2 bolt mount

DBC

flat OD (if applicable)

flange OD

Customer: _____

Equipment label: _____

Information supplied by: _____

Date: _____

FTA214eng REV 2/17