

Special features

High performance and reliability

Azbil corporation's unique compensation system "Characterization" has been improved to achieve higher performance.

± 0.1% of URL stability for 10 years has been achieved.

Significantly reducing calibration work after installation.



High turn-down ratio

Turn-down ratio of 200:1 has been realized. Contributes to reducing the amount of inventory required for spare parts.

Safety design

Safety design complying with the IEC61058 standard: Certified according to Safety Integrity Level2 (SIL2).

Being used as a component of Safety Instrumented System (SIS).

Equipped with the ALARM and the contact output function (OPTIONAL).


In case of failure, the ALARM status can be displayed and confirmed on the built-in-indicator (◆).

Fast response

The response time within 100 ms is realized.

Suitable for pressure control around turbine.

Indicator (◆)

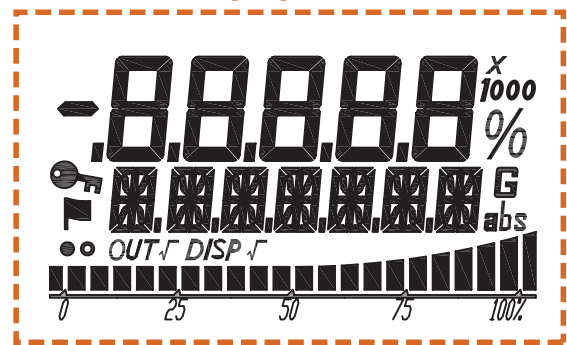

Specification summary (DP transmitter)

Output	4 to 20mA DC : SFN / HART protocol
Accuracy	± 0.04%F.S. (GTX30D / 31D)
Measuring span	0.1 kPa to 14 MPa (covered with 4 models)
Max working Pressure	42 MPa
Long - term stability	± 0.1% of URL for 10-years
Certifications and approvals	NEPSI / FM / ATEX / IECEx / TIIS / KOSHA Explosion-proof, Intrinsically safe, Non-incendive

[Notice] Specifications are subject to change without notice.
No part of this publication may be reproduced or duplicated without the prior written permission of Azbil Corporation.

Other product names, model numbers and company names may be trademarks of the respective company.

Azbil Corporation

Advanced Automation Company

Yamatake Corporation changed its name to Azbil Corporation on April 1, 2012.

1-12-2 Kawana, Fujisawa
Kanagawa 251-8522 Japan
URL: <http://www.azbil.com>